

Practitioner's Docket No. 915-007.52

PATENT

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

re application of: David Akopian

Serial No.: 10/692,287

Group No.:

Filed: October 23, 2003

Examiner:

For: DETERMINATION OF THE CORRELATION PHASE BETWEEN A SIGNAL
AND A REPLICA SEQUENCE

Director, U.S. Patent and Trademark Office
Alexandria, VA 22313-1450

TRANSMITTAL OF CERTIFIED COPY

Attached please find the certified copy of the foreign application from which priority is claimed for this case:

Country: WO
Application Number: PCT/IB02/04420
Filing Date: October 24, 2002

WARNING: "When a document that is required by statute to be certified must be filed, a copy, including a photocopy or facsimile transmission of the certification is not acceptable." 37 C.F.R. 1.4(f) (emphasis added).

Reg. No.: 31,391

SIGNATURE OF PRACTITIONER

Francis J. Maguire

Tel. No.: (203) 261-1234

Ware, Fressola, Van Der Sluys & Adolphson LLP

(type or print name of practitioner)

Customer No. 004955

755 Main Street, P.O. Box 224

P.O. Address

Monroe, Connecticut 06468

NOTE: The claim to priority need be in no special form and may be made by the attorney or agent, if the foreign application is referred to in the oath or declaration, as required by § 1.63.

CERTIFICATE OF MAILING (37 CFR 1.8a)

I hereby certify that this correspondence is, on the date shown below, is being deposited with the United States Postal Service on the date shown below is being deposited with the United States Postal Service with sufficient postage as first class mail in an envelope addressed to the: Director, U.S. Patent and Trademark Office, P.O. Box 1450, Alexandria, VA 22313-1450.

Date: December 4, 2003

Marilyn O'Connell

(Type or print name of person mailing paper)

(Signature of person mailing paper)

(Transmittal of Certified Copy [5-4])



**WORLD INTELLECTUAL PROPERTY ORGANIZATION
ORGANISATION MONDIALE DE LA PROPRIÉTÉ INTELLECTUELLE**

34, chemin des Colombettes, Case postale 18, CH-1211 Genève 20 (Suisse)
Téléphone: (41 22) 338 91 11 - e-mail: wipo.mail @ wipo.int. - Fac-similé: (41 22) 733 54 28

**PATENT COOPERATION TREATY (PCT)
TRAITÉ DE COOPÉRATION EN MATIÈRE DE BREVETS (PCT)**

**CERTIFIED COPY OF THE INTERNATIONAL APPLICATION AS FILED
AND OF ANY CORRECTIONS THERETO**

**COPIE CERTIFIÉE CONFORME DE LA DEMANDE INTERNATIONALE, TELLE QU'ELLE
A ÉTÉ DÉPOSÉE, AINSI QUE DE TOUTES CORRECTIONS Y RELATIVES**

International Application No. }
Demande internationale n° } **PCT/IB02/04420**


International Filing Date } **24 October 2002**
Date du dépôt international } **(24.10.02)**

Geneva/Genève,

**05 November 2003
(05.11.03)**

**International Bureau of the
World Intellectual Property Organization (WIPO)**

**Bureau International de l'Organisation Mondiale
de la Propriété Intellectuelle (OMPI)**

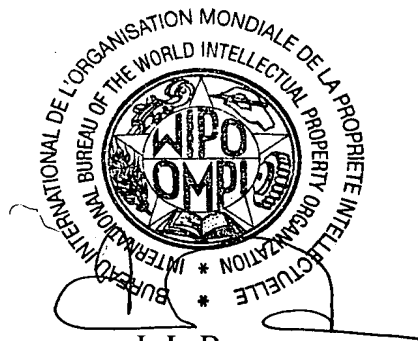

J.-L. Baron

**Head, PCT Receiving Office Section
Chef de la section "office récepteur du PCT"**

PCT REQUEST

Original (for SUBMISSION) - printed on 24.10.2002 12:28:41 PM

0	For receiving Office use only	PCT/IB 02 / 0 4 4 2 0
0-1	International Application No.	
0-2	International Filing Date	24 OCTOBER 2002 (24.10.02)
0-3	Name of receiving Office and "PCT International Application"	INTERNATIONAL BUREAU OF WIPO PCT International Application
0-4	Form - PCT/RO/101 PCT Request	PCT-EASY Version 2.92
0-4-1	Prepared using	(updated 01.06.2002)
0-5	Petition The undersigned requests that the present international application be processed according to the Patent Cooperation Treaty	
0-6	Receiving Office (specified by the applicant)	International Bureau of the World Intellectual Property Organization (RO/IB)
0-7	Applicant's or agent's file reference	020874WO
I	Title of invention	DETERMINATION OF THE CORRELATION PHASE BETWEEN A SIGNAL AND A REPLICA SEQUENCE
II	Applicant	applicant only
II-1	This person is:	all designated States except US
II-2	Applicant for	NOKIA CORPORATION
II-4	Name	Keilalahdentie 4
II-5	Address:	FIN-02150 Espoo Finland
II-6	State of nationality	FI
II-7	State of residence	FI
III-1	Applicant and/or inventor	applicant and inventor
III-1-1	This person is:	US only
III-1-2	Applicant for	AKOPIAN, David
III-1-4	Name (LAST, First)	Ahvenisraitti 24 C 32
III-1-5	Address:	FIN-33720 Tampere Finland
III-1-6	State of nationality	AM
III-1-7	State of residence	FI

IV-1	Agent or common representative; or address for correspondence The person identified below is hereby/has been appointed to act on behalf of the applicant(s) before the competent International Authorities as:	agent
IV-1-1	Name	COHAUSZ & FLORACK (24)
IV-1-2	Address:	Kanzlerstr. 8a D-40472 Düsseldorf Germany
IV-1-3	Telephone No.	+49-211-904900
IV-1-4	Facsimile No.	+49-211-9049049
IV-1-5	e-mail	mail@cohausz-florack.de
V	Designation of States	
V-1	Regional Patent (other kinds of protection or treatment, if any, are specified between parentheses after the designation(s) concerned)	AP: GH GM KE LS MW MZ SD SL SZ TZ UG ZM ZW and any other State which is a Contracting State of the Harare Protocol and of the PCT EA: AM AZ BY KG KZ MD RU TJ TM and any other State which is a Contracting State of the Eurasian Patent Convention and of the PCT EP: AT BE BG CH&LI CY CZ DE DK EE ES FI FR GB GR IE IT LU MC NL PT SE SK TR and any other State which is a Contracting State of the European Patent Convention and of the PCT OA: BF BJ CF CG CI CM GA GN GQ GW ML MR NE SN TD TG and any other State which is a member State of OAPI and a Contracting State of the PCT
V-2	National Patent (other kinds of protection or treatment, if any, are specified between parentheses after the designation(s) concerned)	AE AG AL AM AT AU AZ BA BB BG BR BY BZ CA CH&LI CN CO CR CU CZ DE DK DM DZ EC EE ES FI GB GD GE GH GM HR HU ID IL IN IS JP KE KG KP KR KZ LC LK LR LS LT LU LV MA MD MG MK MN MW MX MZ NO NZ OM PH PL PT RO RU SD SE SG SI SK SL TJ TM TN TR TT TZ UA UG US UZ VC VN YU ZA ZM ZW

PCT REQUEST

Original (for SUBMISSION) - printed on 24.10.2002 12:28:41 PM

V-5	Precautionary Designation Statement In addition to the designations made under items V-1, V-2 and V-3, the applicant also makes under Rule 4.9(b) all designations which would be permitted under the PCT except any designation(s) of the State(s) indicated under item V-6 below. The applicant declares that those additional designations are subject to confirmation and that any designation which is not confirmed before the expiration of 15 months from the priority date is to be regarded as withdrawn by the applicant at the expiration of that time limit.	
V-6	Exclusion(s) from precautionary designations	NONE
VI	Priority claim	NONE
VII-1	International Searching Authority Chosen	European Patent Office (EPO) (ISA/EP)
VIII	Declarations	Number of declarations
VIII-1	Declaration as to the identity of the inventor	-
VIII-2	Declaration as to the applicant's entitlement, as at the international filing date, to apply for and be granted a patent	-
VIII-3	Declaration as to the applicant's entitlement, as at the international filing date, to claim the priority of the earlier application	-
VIII-4	Declaration of inventorship (only for the purposes of the designation of the United States of America)	-
VIII-5	Declaration as to non-prejudicial disclosures or exceptions to lack of novelty	-
IX	Check list	number of sheets
IX-1	Request (including declaration sheets)	4
IX-2	Description	16
IX-3	Claims	5
IX-4	Abstract	1
IX-5	Drawings	2
IX-7	TOTAL	28
	Accompanying items	paper document(s) attached
IX-8	Fee calculation sheet	✓
IX-17	PCT-EASY diskette	-
IX-19	Figure of the drawings which should accompany the abstract	2
IX-20	Language of filing of the international application	English

electronic file(s) attached

EZABST00.TXT


electronic file(s) attached

Diskette

PCT REQUEST

020874WO

Original (for SUBMISSION) - printed on 24.10.2002 12:28:41 PM

X-1	Signature of applicant, agent or common representative	
X-1-1	Name	COHAUSZ & FLORACK (24)
X-1-2	Name of signatory	Dr. Ralph Schippan
X-1-3	Capacity	Patent Attorney

FOR RECEIVING OFFICE USE ONLY

10-1	Date of actual receipt of the purported international application	24 OCTOBER 2002 (24. 10. 02)
10-2	Drawings:	
10-2-1	Received	
10-2-2	Not received	
10-3	Corrected date of actual receipt due to later but timely received papers or drawings completing the purported international application	
10-4	Date of timely receipt of the required corrections under PCT Article 11(2)	
10-5	International Searching Authority	ISA/EP
10-6	Transmittal of search copy delayed until search fee is paid	

FOR INTERNATIONAL BUREAU USE ONLY

11-1	Date of receipt of the record copy by the International Bureau	
------	--	--

**Determination of the correlation phase between a signal
and a replica sequence**

FIELD OF THE INVENTION

The invention relates to a method for determining the correlation phase between a signal received at a receiver and an available replica sequence by using a matched filter checking various correlation phases. The invention relates equally to a receiver, to an electronic device and a communication system comprising such a receiver, and to a device communicating with such a receiver.

BACKGROUND OF THE INVENTION

The correlation phase between a signal received at a receiver and an available replica sequence has to be determined for example for CDMA (Code Division Multiple Access) spread spectrum receivers.

For a spread spectrum communication in its basic form, a data sequence is used by a transmitting unit to modulate a sinusoidal carrier and then the bandwidth of the resulting signal is spread to a much larger value. For spreading the bandwidth, the single-frequency carrier can be multiplied for example by a high-rate binary pseudo-random noise (PRN) code sequence comprising values of -1 and 1, which code sequence is known to a receiver. Thus, the signal that is transmitted includes a data component, a PRN component, and a sinusoidal carrier component. A PRN code period comprises typically 1023 chips, the term chips being used to designate the bits of the code

conveyed by the transmitted signal, as opposed to the bits of the data sequence.

A well known system which is based on the evaluation of such CDMA code modulated signals is GPS (Global Positioning System). In GPS, code modulated signals are transmitted by several satellites that orbit the earth and received by GPS receivers of which the current position is to be determined. Each of the satellites transmits two microwave carrier signals. One of these carrier signals L1 is employed for carrying a navigation message and code signals of a standard positioning service (SPS). The L1 carrier signal is modulated by each satellite with a different C/A (Coarse Acquisition) Code known at the GPS receivers. Thus, different channels are obtained for the transmission by the different satellites. The C/A code, which is spreading the spectrum over a 1 MHz bandwidth, is repeated every 1023 chips, the epoch of the code being 1 ms. The carrier frequency of the L1 signal is further modulated with the navigation information at a bit rate of 50 bit/s. The navigation information, which constitutes a data sequence, can be evaluated for example for determining the position of the respective receiver.

A receiver of a code modulated signal has to have access to a synchronized replica of the modulation code, in order to be able to de-spread the data sequence of the signal. To this end, a synchronization has to be performed between the received code modulated signal and an available replica code sequence. Usually, an initial synchronization called acquisition is followed by a fine synchronization called tracking. In both synchronization scenarios, a correlator is used to find the best match

between the replica code sequence and the received signal and thus to find their relative shift called code phase or, more generally, correlation phase. The search can be performed with different assumptions on an additional frequency modulation of the received signal. Such an additional modulation may occur for example due to a Doppler effect and/or a receiver clock inaccuracy and be as large as ± 6 kHz. Similarly, a correlation phase between some other kind of received signal, e.g. a radar signal, and a corresponding replica sequence might have to be determined by a correlator for enabling an evaluation of the received signal.

A correlator aligns the incoming signal with the replica sequence, multiplies the elements elementwise and integrates the resulting products. If the alignment is correct, then the correlation results in a larger response compared to the case of a misalignment. Thus, detecting the correlation peak is suited to find the correlation phase.

Two main types of correlators have been suggested so far. A first type of correlators performs a direct correlation of a replica sequence and the received signal in the time domain. This implies that a dedicated processing step is carried out for each possible correlation phase. In case there is a large number of correlation phases to check, the computational burden is significant, which is critical especially for software based receivers. There exist different implementation approaches for the first type of correlators. They may be formed in particular with matched filters or ordinary correlators. A second type of correlators relies on frequency domain techniques employing Discrete Fourier Transforms (DFT), which enable

a parallel processing for all possible correlation phases. Thus, the DFT based correlators enable a reduction of the computational burden, in particular if the DFTs are realized as Fast Fourier Transforms (FFT).

Nevertheless, the first type of correlators is still widely used. One reason for this is the simplicity of the implementation. While the FFT might be suited to reduce the complexity of the correlator, the use of FFT requires complicated algorithms. Moreover, the FFT approximates calculations due to the use of transform coefficients. Another reason for further performing calculations in the time domain is that while in principle, the phase of the received signal relative to the available replica sequence can have any possible value, in some situations, the range of the possible correlation phases can be reduced based on some a-priori knowledge. Currently, however, a limited search of correlation phases can only be realized with correlators performing a correlation in the time domain. Known DFT based methods inherently perform the search of all possible correlation phase in parallel. Therefore, their usage is not feasible in situations in which the search is to be carried out only over a limited number of all possible correlation phases.

SUMMARY OF THE INVENTION

It is an object of the invention to reduce the computational load of correlators performing a correlation in the time domain. More specifically, it is an object of the invention to reduce the computational load of matched filters which are employed for determining the correlation phase between a received signal and an available replica sequence.

In a method according to the invention, a matched filter multiplies samples of the received signal with samples of the replica sequence and sums the resulting products to obtain a correlation value for a specific correlation phase. The multiplication performed by the matched filter can be for instance an elementwise multiplication. The samples of the received signal and the samples of the available replica sequence are shifted relative to each other for each correlation phase which is to be checked. It is proposed that results obtained in the calculations for one correlation phase are used by the matched filter also for calculations for a subsequent correlation phase.

A conventional matched filter, in contrast, performs the calculations for each correlation phase independently.

Moreover, a receiver, an electronic device comprising a receiver and some other device are proposed, either comprising means for carrying out the steps of the proposed method. The electronic device can be for instance a mobile terminal which is capable of communicating with a communication network. In case the processing is performed in another unit than the receiver, the required information about the received signals is forwarded by the receiver to this unit. The proposed other device can be for instance a network element of a network. The object is also reached with a system comprising a receiver and a device, in which system either the receiver or the device comprises means for carrying out the steps of the proposed method. In case the receiver performs the processing, the device may provide assistance data to the receiver.

The invention proceeds from the consideration that usually, a replica sequence will comprise several sub-sequences of at least twice the same value in a row. When the received samples and the replica samples are shifted by one position relative to each other after a correlation value for one correlation phase has been determined, thus partly the same multiplication results are required again when determining the correlation value of the next correlation phase. This occurrence can be exploited for reducing the number of multiplications and/or summings for a respective next correlation phase, since the used replica sequence is known.

It is an advantage of the invention that the number of operations can be reduced, and thus the employed processing means, either hardware or software, may be slower compared to known methods. The frequency requirement is reduced for software, which allows to employ software correlators with a lower frequency. Thus, the invention facilitates the use of software correlators. If the operations are carried out slowly, also the power consumption can be reduced.

Alternatively, the reduced number of operations can be used for carrying out the processing faster than before. If the operations are carried out fast, the acquisition of signals and following operations like a positioning can be accelerated.

Due to the reduced number of operations, the matched filter is also particularly easy to implement and more competitive with DFT based correlators.

Preferred embodiments of the invention become apparent from the dependent claims.

The amount of operations can be reduced with the invention for any kind of signal which has to be correlated with an available replica sequence. The received signal can be for instance a code modulated signal and the replica sequence a replica code sequence.

The invention is of particular advantage, when the received signal comprises a binary sequences, for instance a BPSK (binary phase shift keying) binary code with which the signal is modulated. A BPSK binary code is employed e.g. in GPS. A binary sequence is composed of the values +1 and -1. In case the signal comprises a binary sequence, only about half of the elements will change their values from one replica sample to the next. The required amount of operations for the correlation can therefore be halved with the invention. As a result, the hardware or software could be half as fast to obtain a correlation phase with the same speed as with a known matched filter, or the acquisition of a correlation phase could be twice as fast compared to a known matched filter when using the same hardware or software. Still, the invention is also of advantage when used in other systems, in which the two input signals to the matched filter may be composed of any number of any discrete values.

The multiplications in the correlation calculations can be performed in different ways. For example, in case the received signal and the available replica sequence comprise a binary sequence consisting of the values +1 and -1, the multiplications may be realized e.g. simply

with a sign change for each required multiplication by -1.

The results of correlation calculations for a preceding correlation phase can be made use of in several ways when determining the correlation value for the current correlation phase. The most suitable way may also depend on the kind of sequence comprised in the received signal, e.g. on the employed code. For example, the entire correlation value resulting for a preceding correlation phase can be used as basis, which is then corrected for the current correlation phase. In one alternative, only those multiplication results of a preceding correlation phase which are known to stay the same are re-used for the current correlation phase.

The invention can be used in both, acquisition and tracking schemes.

In both cases, the invention may be used for determining the correlation phase and the frequency of a remaining complex sinusoidal modulation. The correlation phase is determined according to the peaks of a cross-correlation function, and the correlation is calculated e.g. at initial code wipe-off stages. The processing for weak signals requires additional coherent and non-coherent integrations. The invention can therefore also be used as a building block for other methods implementing different scenarios of coherent and/or non-coherent processing for possible multiple frequency candidates.

As indicated above, the invention can be implemented in hardware or in software. In case the invention is employed as part of acquisition and tracking algorithms,

the implementation corresponds advantageously to the implementation of these algorithms.

The invention can be used in any system which uses matched filters. It can be employed in particular, though not exclusively, in a communication system using CDMA spread spectrum receivers, for instance in a positioning system like GPS or Galileo. Alternatively, it could be employed for example in radar technology.

BRIEF DESCRIPTION OF THE FIGURES

Other objects and features of the present invention will become apparent from the following detailed description considered in conjunction with the accompanying drawings, wherein:

- Fig. 1 illustrates an embodiment of the method according to the invention;
- Fig. 2a shows a sequence of samples of an received code modulated signal;
- Fig. 2b shows samples of a binary replica code sequence; and
- Fig. 2c indicates sign changes in the replica code sequence of figure 1b.

DETAILED DESCRIPTION OF THE INVENTION

Figure 1 illustrates an exemplary embodiment of the method according to the invention implemented in a GPS receiver.

The GPS receiver comprises a receiving unit for receiving signals from different GPS satellites which are modulated

with different C/A-codes. The C/A codes employed by the satellites for modulating the signals are BPSK binary PRN codes consisting of only +1 and -1. The GPS receiver moreover comprises a tracking unit with a correlator. The correlator employs a matched filter for acquiring and tracking received satellite signals. The depicted method is implemented more specifically in this matched filter. The receiver further stores a replica code sequence for each of the satellites, which are also called space vehicles SV. Also the positions of sign changes in the stored replica code sequences are known to the receiver.

For determining the correlation between a signal received from one of the satellites SV and the corresponding replica code sequence, first this replica code sequence is retrieved. The number of samples of the replica code sequence (N) depends on the length of the code employed by the respective satellite for modulating the signal. It also depends on the sampling rate of the incoming signal. E.g., in case of 1 sample per chip sampling, the replica code sequence length is $N=1023$. The samples of the retrieved replica code sequence are denoted as:

$$r_{N-1}, r_{N-2}, \dots, r_3, r_2, r_1, r_0$$

A counter value i counting the code phases that are to be checked is set to $i=0$.

Further, a first set of consecutive samples of a received code modulated signal is stored in a memory of the receiver. The received and stored samples are denoted as:

$$x_{N-1}, x_{N-2}, \dots, x_3, x_2, x_1, x_0$$

These samples are multiplies elementwise with samples of the retrieved replica code sequence.

The resulting products are then summed, in order to obtain a correlation value C_0 for the first code phase.

In the following, a loop is entered for determining the correlation values also for subsequent code phases. For each code phase that is to be checked, the counter value i is incremented by 1 at the beginning of the loop.

Further, the memory of the receiver is updated for each code phase by removing the respective oldest sample and by introducing a new sample. For the second code phase, for example, a new sample x_N of the incoming signal is added to the set of consecutive samples, while the oldest sample x_0 is removed from the memory. The stored set of N samples for the second code phase is thus given by:

$$x_N, x_{N-1}, x_{N-2}, \dots, x_3, x_2, x_1$$

The replica code sequence, in contrast, stays the same for all code phases, therefore a relative shift is obtained between the received samples and the replica samples.

Based on the respective new set of code samples, a correlation value C_1 is also calculated for the second code phase and later on for the subsequent code phases. In contrast to a conventional correlation, however, multiplications are not carried out for all samples of the respective set of received code samples, as will be explained in the following.

When comparing the first set of stored input samples with the second set of stored input samples, it can be seen that the samples $x_{N-1}, x_{N-2}, \dots, x_3, x_2, x_1$ occur in both sets, even though they are aligned differently with the replica samples. In case a shifted received sample is aligned with a replica sample of the same value as before, the multiplication for this sample will also have the same result as before, which can be made use of.

The conventional correlator output, i.e. the correlation value C_i for a specific code phase i , can be written as:

$$C_i = \sum_{j=0}^{N-1} r_j x_{j+i}$$

First this sum can be split, taking out the respective oldest sample x_i :

$$C_i = \sum_{j=0}^{N-1} r_j x_{j+i} = r_0 x_i + \sum_{j=1}^{N-1} r_j x_{j+i}$$

Then, the remaining sum can be considered to be composed of two subsums:

$$C_i = r_0 x_i + \sum_{j \in J_+} r_j x_{j+i} + \sum_{j \in J_-} r_j x_{j+i}$$

The first subsum contains the multiplications of input samples with those replica samples which have the same sign as the respective preceding replica sample. The set of the values of j identifying these replica samples is denoted as J_+ , where

$j \in J_+$ if $(r_j = 1 \ \& \ r_{j-1} = 1)$ OR $(r_j = -1 \ \& \ r_{j-1} = -1)$.

The second subsum contains the multiplications of input samples with those replica samples which have another sign than the respective preceding replica sample. The set of the values of j identifying these replica samples is denoted as J_- , where

$j \in J_-$ if $(r_j = 1 \ \& \ r_{j-1} = -1)$ OR $(r_j = -1 \ \& \ r_{j-1} = 1)$.

For illustration, figure 2a shows a row of eleven rectangles 21 representing consecutive samples of a part of a stored set of input samples without indication of any specific values. Figure 2b shows a row of eleven rectangles 22 representing samples of a part of an exemplary replica code sequence having from left to right the values $\{+1, -1, +1, -1, -1, +1, +1, +1, +1, -1, -1\}$. The indices of the input samples x and the replica samples r increases from right to right. While the replica samples remain unchanged for all code phases, the input samples are shifted for each new code phase by one sample to the right, such that the oldest sample is removed from the set of samples and a new sample is introduced to the set of samples at the left hand side.

Figure 2c points out by means of a further row of eleven rectangles 23 those replica samples of figure 2b which provide the same sign for an associated input sample of figure 2a as will be provided to this input sample after a shift, i.e. those replica samples r_j which are identical to the respective preceding replica sample r_{j-1} . These replica samples are indicated with an associated white rectangle, while the replica samples providing another sign than the preceding replica sample are indicated with

an associated black rectangle. Thus, the 4th, 6th, 7th, 8th and 10th rectangle from the left is white, and the 1st, 2nd, 3rd, 5th and 9th rectangle from the left is black. Since only part of the entire code is depicted, the 11th replica sample from the left cannot be told from the figure to repeat or invert the preceding sample, and thus a hatched rectangle is associated to it.

The elementwise multiplication with the replica samples indicated with a white rectangle will result in the same product before a shift as the elementwise multiplication with the preceding replica samples after a shift. For example, if the 6th input sample from the left is assumed to have a value "a", the elementwise multiplication will result in $(+1)*a$, since the value of the 6th replica sample is +1. After the shift by one sample to the right for the next code phase, "a" will constitute the value of the 7th sample from the left in figure 1a. Since the 7th replica sample has equally a value of +1, the elementwise multiplication will result again in $(+1)*a$.

The indices of those replica samples to which a white rectangle is associated are part of the set J_+ , while the indices of those replica samples to which a black rectangle is associated are part of the set J_- .

With the above definitions, the correlation value C_{i+1} for a respective next code phase $i+1$ can be written as:

$$C_{i+1} = -C_i - r_0 x_i + r_{N-1} x_{i+N} + \sum_{j \in J_+} 2 * r_j x_{j+i} \quad (1)$$

or alternatively as:

$$C_{i+1} = C_i - r_0 x_i + r_{N-1} x_{i+N} - \sum_{j \in J_-} 2^* r_j x_{j+i} \quad (2)$$

In the example presented in figures 2a to 2c, the sets J_+ and J_- are approximately of the same size. This means that with both equations, instead of performing N additions at each stage, only $N/2+3$ additions are needed, plus some shifts for realizing the multiplications by 2. These shifts could be incorporated into the addition operation without increasing the cost of operation.

Sometimes, however, the distribution of the indices of the replica samples to the sets J_+ and J_- may vary between different replica code sequences.

In the embodiment of the method illustrated in figure 1, it is therefore first checked, which one of the sets J_+ and J_- has a larger size. For each replica, the equation (1) or (2) is selected which causes the minimum number of operations depending on the number of samples in the sets J_+ and J_- . That is, in case the set J_+ comprises less samples, equation (1) is used, while in case the set J_- comprises less samples, equation (2) is used for determining the correlation for the next code phase. Thus, there will be different equations used for different codes.

It is to be noted that the actual comparison between the sizes of sets J_+ and J_- does not have to be carried out in real time during the matched filter operation. Since the replica code sequences for all satellites are known and the sign-changes within the replica code sequences as well, the sizes of the two sets can easily be determined and compared beforehand and the result be stored for use

by the matched filter. Then, it will be known at the matched filter without any computational requirements that for one satellite the first option should be used, while for another satellite, the second option should be used. With this approach, at least a reduction in complexity by half is achieved.

Alternatively, one of the equations (1) or (2) could be determined to be used for all replica code sequences. In this case, a reduction in complexity by half will be achieved on an average.

The described loop will be continued for a respective subsequent code phase, until a correlation value C_i has been determined for all N code phases that are to be checked.

The correct code phase can then be obtained by determining the maximum correlation value out of all determined correlation values.

The presented embodiment can easily be generalized for replica sequences composed of samples with values from any discrete set, preferably with a small number of elements. For binary replica sequences, this set contains only +1 and -1, as mentioned above, and has thus just two elements.

It is to be noted that the described embodiment constitutes only one of a variety of possible embodiments of the invention.

C l a i m s

1. Method for determining the correlation phase between a signal received at a receiver and an available replica sequence by using a matched filter checking various correlation phases, said matched filter multiplying samples (21) of said received signal with samples (22) of said replica sequence and summing the resulting products to obtain a correlation value for a specific correlation phase, which samples (21) of said received signal and which samples (22) of said available replica sequence are shifted relative to each other for each correlation phase which is to be checked, wherein results obtained in the calculations for one correlation phase are used by said matched filter for calculations for a subsequent correlation phase.
2. Method according to claim 1, wherein said matched filter multiplies said samples (21) of said received signal elementwise with samples (22) of said replica sequence.
3. Method according to claim 1 or 2, wherein said received signal comprises a binary sequence.
4. Method according to claim 3, wherein the possible values of said binary sequence are +1 and -1.
5. Method according to claim 4, wherein C_i constitutes a determined correlation value for an i^{th} checked

correlation phase, wherein N is the length of said binary sequence, wherein x_{j+i} constitutes a j^{th} samples of said received signal for said i^{th} correlation phase, wherein the samples (22) of said replica sequence are not shifted for the different correlation phases which are to be checked, wherein r_j constitutes a j^{th} sample of said replica sequence, wherein a set J_+ comprises the indices j for which $(r_j = 1 \ \& \ r_{j-1} = 1)$ OR $(r_j = -1 \ \& \ r_{j-1} = -1)$, and wherein a correlation value C_{i+1} for the $(i+1)^{\text{th}}$ correlation phase is calculated as:

$$C_{i+1} = -C_i - r_0 x_i + r_{N-1} x_{i+N} + \sum_{j \in J_+} 2 * r_j x_{j+i} .$$

6. Method according to claim 4, wherein C_i constitutes the determined correlation value for an i^{th} checked correlation phase i, wherein N is the length of said binary sequence, wherein x_{j+i} constitutes a j^{th} samples of said received signal for said i^{th} correlation phase, wherein the samples (22) of said replica sequence are not shifted for the different correlation phases which are to be checked, wherein r_j constitutes a j^{th} samples of a said replica sequence, wherein a set J_- comprises the indices j for which $(r_j = 1 \ \& \ r_{j-1} = -1)$ OR $(r_j = -1 \ \& \ r_{j-1} = 1)$, and wherein a correlation value C_{i+1} for the $(i+1)^{\text{th}}$ correlation phase is calculated as:

$$C_{i+1} = C_i - r_0 x_i + r_{N-1} x_{i+N} - \sum_{j \in J_-} 2 * r_j x_{j+i} .$$

7. Method according to claim 4, wherein C_i constitutes a determined correlation value for an i^{th} checked correlation phase, wherein N is the length of said

binary sequence, wherein x_{j+i} constitutes a j^{th} samples of said received signal for said i^{th} correlation phase, wherein the samples (22) of said replica sequence are not shifted for the different correlation phases which are to be checked, wherein r_j constitutes a j^{th} sample of said replica sequence, wherein a set J_+ comprises the indices j for which $(r_j = 1 \ \& \ r_{j-1} = 1) \text{ OR } (r_j = -1 \ \& \ r_{j-1} = -1)$, wherein a set J_- comprises the indices j for which $(r_j = 1 \ \& \ r_{j-1} = -1) \text{ OR } (r_j = -1 \ \& \ r_{j-1} = 1)$, and wherein a correlation value C_{i+1} for the $(i+1)^{\text{th}}$ correlation phase is calculated as:

$$C_{i+1} = -C_i - r_0 x_i + r_{N-1} x_{i+N} + \sum_{j \in J_+} 2 * r_j x_{j+i} ,$$

if the size of said set J_- is larger than the size of said set J_+ , and as:

$$C_{i+1} = C_i - r_0 x_i + r_{N-1} x_{i+N} - \sum_{j \in J_-} 2 * r_j x_{j+i} ,$$

if the size of said set J_+ is larger than the size of said set J_- .

8. Method according to one of the preceding claims, further comprising a subsequent coherent and/or noncoherent processing for handling signals of low strength.
9. Method according to one of the preceding claims, wherein said received signal is a code modulated signal, and wherein said replica sequence is a replica code sequence.
10. Method according to claim 9, wherein said code modulation of said received code modulated signal is

a Code Division Multiple Access (CDMA) spread spectrum modulation.

11. Use of a method according to one of the preceding claims in a process for acquisition and/or tracking of signals received at a receiver.
12. Receiver comprising
 - receiving means for receiving signals; and
 - processing means for carrying out the method according to one of claims 1 to 10.
13. Receiver according to claim 12, which receiver is a receiver of a positioning system.
14. Electronic device comprising a receiver according to claim 12 or claim 13.
15. Electronic device according to claim 14, wherein said electronic device is a mobile terminal capable of communicating with a communication network.
16. Device comprising
 - means for receiving from a receiver information on signals received by said receiver; and
 - processing means for carrying out the method according to one claims 1 to 10.
17. Device according to claim 16, which device is a network element of a network.

18. System comprising

- a receiver comprising means for receiving signals, and means for providing information on received signals; and
- a device according to claim 16 or 17.

19. System comprising

- a receiver according to claim 12 or 13; and
- a device for providing assistance data to said receiver.

20. System according to claim 19, wherein said device is a network element of a network.

21. System according to one of claims 18 to 20, wherein said system is a positioning system.

A b s t r a c t

The invention relates to a method for determining the correlation phase between a signal received at a receiver and a replica sequence. A matched filter multiplies samples 21 of the received signal with samples 22 of the replica and sums the resulting products to obtain a correlation value for a specific correlation phase. The samples of the received signal and the replica are shifted relative to each other for each correlation phase that is to be checked. In order to reduce the computational load, it is proposed that results obtained in the correlation calculations for one correlation phase are used by the matched filter also for calculations for a subsequent correlation phase. The invention relates equally to a corresponding receiver, to an electronic device comprising such a receiver, to a device cooperating with such a receiver and to a corresponding system.

For publication: Figure 2

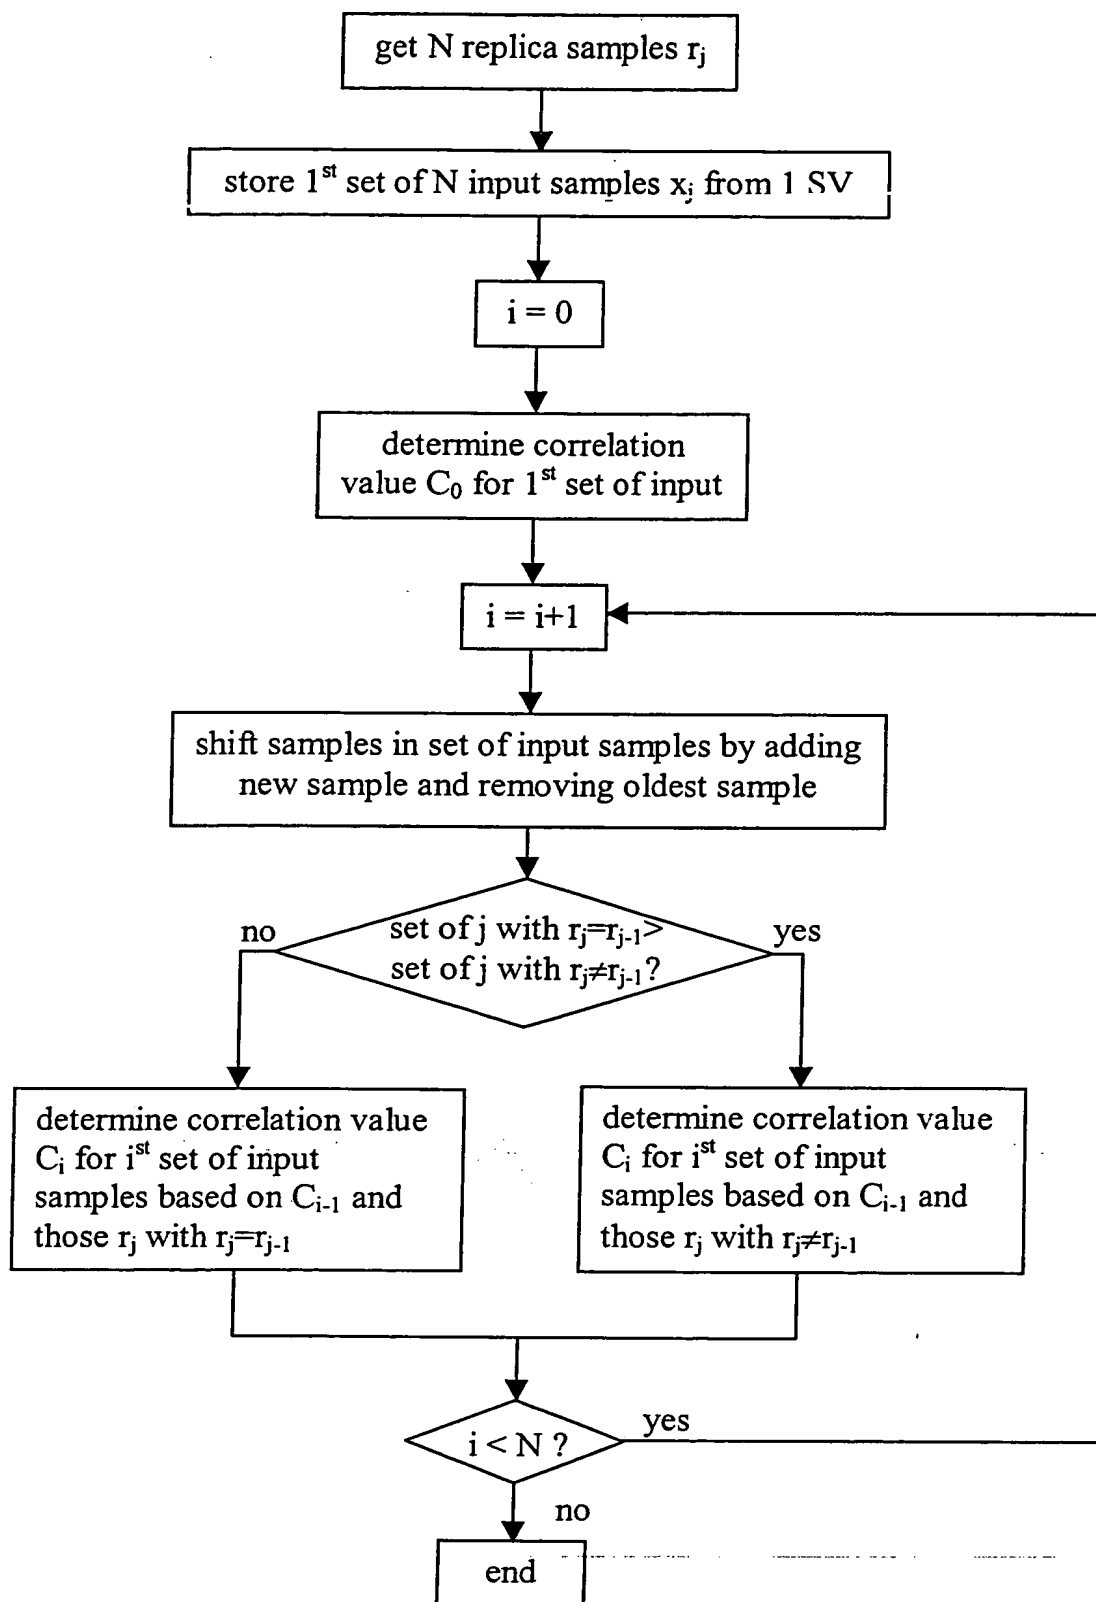


FIG. 1

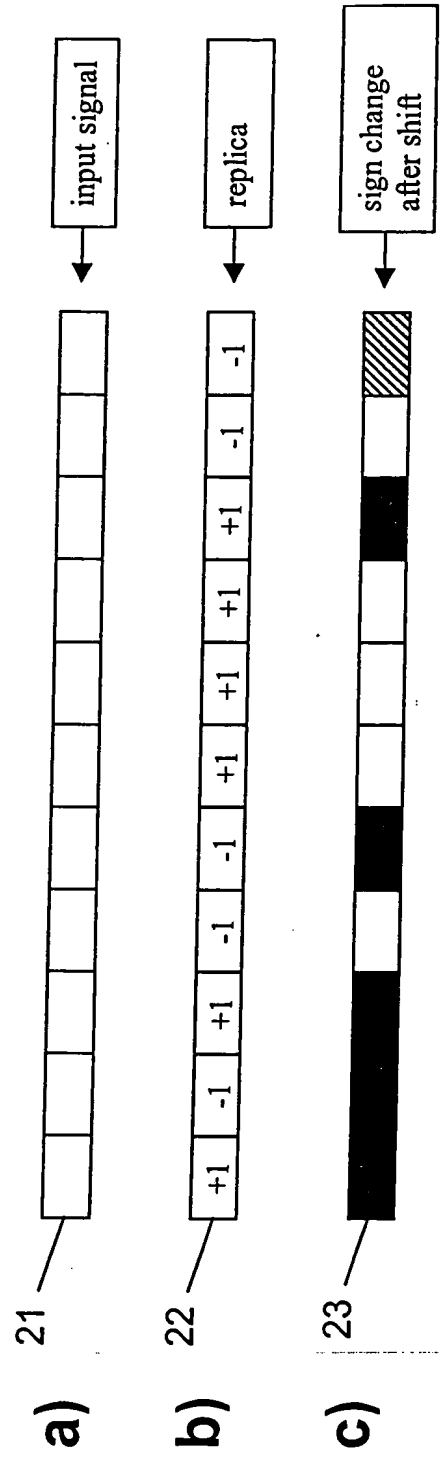


FIG. 2